



Rvs concentrische lasverloopstukken

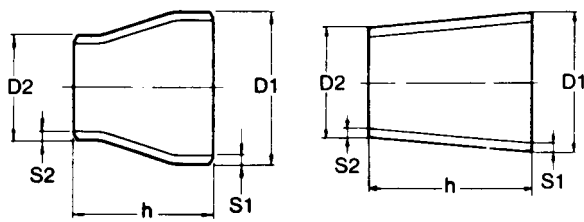


mm Afmeting		inch Afmeting		304L	304L	316L	316L						
D1	D2	D1	D2	S1	S2	h	kg/st	gelast	ndl	gelast	naadloos		
21,30	x 17,20			2,00	2,00	12,3	0,02			x			
21,34	x 17,15	1/2"	x 3/8" Sch 10 S	2,11	1,65	50,8	0,03						x
21,34	x 17,15	1/2"	x 3/8" Sch 40 S STD	2,77	2,31	50,8	0,05						x
26,67	x 21,34	3/4"	x 1/2" Sch 10 S	2,11	2,11	38,1	0,04	x	x	x	x		
26,67	x 21,34	3/4"	x 1/2" Sch 40 S STD	2,87	2,77	38,1	0,06	x	x	x	x		
26,67	x 21,34	3/4"	x 1/2" Sch 80 S XS	3,91	3,73	38,1	0,08		x				x
26,67	x 21,34	3/4"	x 1/2" Sch 160	5,54	4,75	38,1	0,15						
26,90	x 21,30			2,00	2,00	16,8	0,02				x		
28,00	x 18,00			1,50	1,50	30,0	0,02	x			x		
33,40	x 21,34	1"	x 1/2" Sch 10 S	2,77	2,11	50,8	0,09	x	x	x	x		
33,40	x 21,34	1"	x 1/2" Sch 40 S STD	3,38	2,77	50,8	0,11	x	x	x	x		
33,40	x 21,34	1"	x 1/2" Sch 80 S XS	4,55	3,37	50,8	0,13		x				x
33,40	x 21,34	1"	x 1/2" Sch 160	6,35	4,75	50,8	0,22						x
33,40	x 26,67	1"	x 3/4" Sch 10 S	2,77	2,11	50,8	0,10	x	x	x	x		
33,40	x 26,67	1"	x 3/4" Sch 40 S STD	3,38	2,87	50,8	0,12	x	x	x	x		
33,40	x 26,67	1"	x 3/4" Sch 80 S XS	4,55	3,91	50,8	0,15		x				x
33,40	x 26,67	1"	x 3/4" Sch 160	6,35	5,54	50,8	0,22						x
33,70	x 21,30			2,00	2,00	37,3	0,50				x		
33,70	x 26,90			2,00	2,00	20,4	0,03				x		
34,00	x 28,00			1,50	1,50	80,2	0,02	x					
38,10	x 25,40			1,50	1,50	97,0	0,02				x		
40,00	x 28,00			1,50	1,50	102,0	0,03				x		
42,16	x 21,34	1.1/4"	x 1/2" Sch 40 S STD	3,56	2,77	50,8	0,13		x	x	x		
42,16	x 26,67	1.1/4"	x 3/4" Sch 10 S	2,77	2,11	50,8	0,11	x	x	x	x		
42,16	x 26,67	1.1/4"	x 3/4" Sch 40 S STD	3,56	2,87	50,8	0,14	x	x	x	x		
42,16	x 26,67	1.1/4"	x 3/4" Sch 80 S XS	4,85	3,91	50,8	0,19		x				x
42,16	x 33,40	1.1/4"	x 1" Sch 10 S	2,77	2,77	50,8	0,12	x	x	x	x		
42,16	x 33,40	1.1/4"	x 1" Sch 40 S STD	3,56	3,38	50,8	0,16	x			x		x
42,16	x 33,40	1.1/4"	x 1" Sch 80 S XS	4,85	4,55	50,8	0,21		x				x
42,40	x 33,70			2,00	2,00	26,1	0,07	x			x		

Rvs concentrische lasverloopstukken

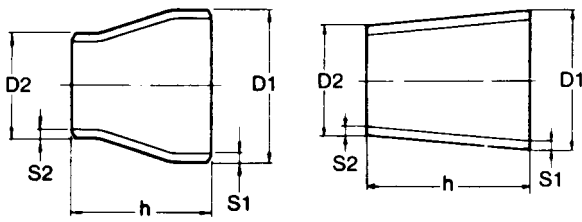


mm Afmeting		inch Afmeting						304L	304L	316L	316L
D1	D2	D1	D2	S1	S2	h	kg/st	gelast	ndl	gelast	ndl
44,00	x 29,00			2,00	2,00	45,0	0,05			x	
48,26	x 21,34	1.1/2"	x 1/2" Sch 10 S	2,77	2,11	63,5	0,14	x	x	x	x
48,26	x 21,34	1.1/2"	x 1/2" Sch 40 S STD	3,68	2,77	63,5	0,18	x	x	x	x
48,26	x 21,34	1.1/2"	x 1/2" Sch 80 S XS	5,08	3,73	63,5	0,24		x		x
48,26	x 21,34	1.1/2"	x 1/2" Sch 160	7,14	4,78	63,5	0,46		x		
48,26	x 26,67	1.1/2"	x 3/4" Sch 10 S	2,77	2,11	63,5	0,15	x	x	x	x
48,26	x 26,67	1.1/2"	x 3/4" Sch 40 S STD	3,68	2,87	63,5	0,20	z	x	x	x
48,26	x 26,67	1.1/2"	x 3/4" Sch 80 S XS	5,08	3,91	63,5	0,27		x		x
48,26	x 33,40	1.1/2"	x 1" Sch 10 S	2,77	2,77	63,5	0,17	x	x	x	x
48,26	x 33,40	1.1/2"	x 1" Sch 40 S STD	3,68	3,38	63,5	0,22	x	x	x	x
48,26	x 33,40	1.1/2"	x 1" Sch 80 S XS	5,08	4,55	63,5	0,29		x		x
48,26	x 42,16	1.1/2"	x 1.1/4" Sch 10 S	2,77	2,77	63,5	0,18	x	x	x	x
48,26	x 42,16	1.1/2"	x 1.1/4" Sch 40 S STI	3,68	3,56	63,5	0,24	x	x	x	x
48,26	x 42,16	1.1/2"	x 1.1/4" Sch 80 S XS	5,08	4,85	63,5	0,32		x		x
48,30	x 33,70			2,00	2,00	43,8	0,09			x	
48,30	x 42,40			2,00	2,00	17,7	0,04			x	
50,80	x 25,40			1,50	1,50	115,0	0,10			x	
50,80	x 38,10			1,50	1,50	97,0	0,12			x	
52,00	x 28,00			1,50	1,50	130,0	0,07	x		x	
52,00	x 40,00			1,50	1,50	113,0	0,09			x	
54,00	x 30,00			2,00	2,00	60,0	0,12	x			
54,00	x 34,00			2,00	2,00	72,0	0,11			x	
54,00	x 44,00			2,00	2,00	30,0	0,07			x	
60,30	x 21,30			2,00	2,00	117,0	0,23			x	
60,30	x 33,70			2,00	2,00	79,8	0,19			x	
60,30	x 42,40			2,00	2,00	53,7	0,14			x	
60,30	x 48,30			2,00	2,00	35,0	0,10			x	
60,33	x 21,34	2"	x 1/2" Sch 10 S	2,77	2,11	76,2	0,23	x	x	x	x
60,33	x 21,34	2"	x 1/2" Sch 40 S STD	3,91	2,77	76,2	0,28	x	x	x	x
60,33	x 21,34	2"	x 1/2" Sch 80 S XS	5,54	3,73	76,2	0,38		x		
60,33	x 26,67	2"	x 3/4" Sch 10 S	2,77	2,11	76,2	0,22	x	x	x	x
60,33	x 26,67	2"	x 3/4" Sch 40 S STD	3,91	2,87	76,2	0,30	x	x	x	x
60,33	x 26,67	2"	x 3/4" Sch 80 S XS	5,54	3,91	76,2	0,41		x		x
60,33	x 33,40	2"	x 1" Sch 10 S	2,77	2,77	76,2	0,23	x	x	x	x
60,33	x 33,40	2"	x 1" Sch 40 S STD	3,91	3,37	76,2	0,32	x	x	x	x

Rvs concentrische lasverloopstukken

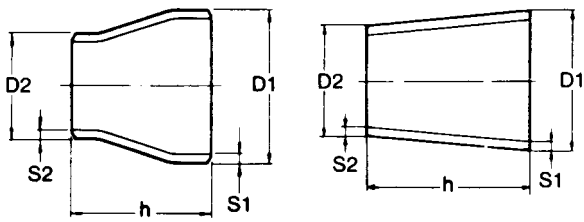


mm Afmeting		inch Afmeting							304L	304L	316L	316L
D1	D2	D1	D2	S1	S2	h	kg/st		gelast	naadloos	gelast	naadloos
60,33	x 33,40	2"	x 1"	Sch 80 S XS	5,54	4,55	76,2	0,44		x		x
60,33	x 33,40	2"	x 1"	Sch 160	8,71	6,35	76,2	0,94		x		x
60,33	x 42,16	2"	x 1.1/4"	Sch 10 S	2,77	2,77	76,2	0,25	x	x	x	x
60,33	x 42,16	2"	x 1.1/4"	Sch 40 S STD	3,91	3,56	76,2	0,35	x	x	x	x
60,33	x 42,16	2"	x 1.1/4"	Sch 80 S XS	5,54	4,85	76,2	0,48		x		x
60,33	x 48,26	2"	x 1.1/2"	Sch 10 S	2,77	2,77	76,2	0,27	x	x	x	x
60,33	x 48,26	2"	x 1.1/2"	Sch 40 S STD	3,91	3,68	76,2	0,37	x	x	x	x
60,33	x 48,26	2"	x 1.1/2"	Sch 80 S XS	5,54	5,08	76,2	0,51		x		x
63,50	x 31,80				1,50	1,50	97,0	0,09	x			
63,50	x 38,10				1,50	1,50	65,0	0,09	x		x	
63,50	x 50,80				1,50	1,50	97,0	0,13	x		x	
69,00	x 44,00				2,00	2,00	75,0	0,20			x	
69,00	x 54,00				2,00	2,00	45,0	13,00			x	
70,00	x 40,00				1,50	1,50	117,0	0,15			x	
70,00	x 52,00				1,50	1,50	135,0	0,15			x	
73,03	x 33,40	2.1/2"	x 1"	Sch 10 S	3,05	2,77	88,9	0,35		x		
73,03	x 48,26	2.1/2"	x 1.1/2"	Sch 10 S	3,05	2,77	88,9	0,39	x		x	
73,03	x 48,26	2.1/2"	x 1.1/2"	Sch 40 S STD	5,16	3,68	88,9	0,66	x	x	x	x
73,03	x 60,33	2.1/2"	x 2"	Sch 10 S	3,05	2,77	88,9	0,43	x	x	x	x
73,03	x 60,33	2.1/2"	x 2"	Sch 40 S STD	5,16	3,91	88,9	0,72	x	x	x	x
73,03	x 60,33	2.1/2"	x 2"	Sch 80 S XS	7,01	5,54	88,9	0,92				x
76,10	x 25,40				1,50	1,50	88,9	0,25	x			
76,10	x 33,70				2,00	2,00	127,2	0,26			x	
76,10	x 38,10				1,50	1,50	132,0	0,26			x	
76,10	x 42,40				2,00	2,00	101,1	0,26			x	
76,10	x 42,40				2,50	2,50	101,1	0,39			x	
76,10	x 48,30				2,00	2,00	83,4	0,26			x	
76,10	x 48,30				2,00	3,00	83,4	0,35			x	
76,10	x 50,80				1,50	1,50	115,0	0,26	x		x	
76,10	x 60,30				2,00	2,00	47,4	0,16			x	
76,10	x 60,30				3,00	3,00	47,4	0,24			x	
76,10	x 63,50				1,50	1,50	97,0	0,16	x		x	
84,00	x 44,50				2,00	2,00	120,0	0,45	x	x	x	
84,00	x 54,00				2,00	2,00	90,0	0,30		x	x	
84,00	x 69,00				2,00	2,00	45,0	0,17	x	x	x	

Rvs concentrische lasverloopstukken

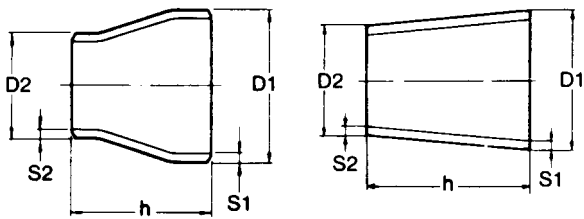


mm Afmeting		inch Afmeting		304L	304L	316L	316L						
D1	D2	D1	D2	S1	S2	h	kg/st	gelast	naadloos	gelast	naadloos		
85,00	x 52,00			1,50	1,50	120,0	0,30	x					
88,90	x 33,40	3" x	1" Sch 10 S	3,05	2,77	88,9	0,43	x	x	x	x		
88,90	x 33,40	3" x	1" Sch 40 S STD	5,49	3,38	88,9	0,74	x	x	x	x		
88,90	x 33,40	3" x	1" Sch 80 S XS	7,62	4,55	88,9	0,83						x
88,90	x 42,16	3" x	1.1/4" Sch 10 S	3,05	2,77	88,9	0,40				x		
88,90	x 48,26	3" x	1.1/2" Sch 10 S	3,05	2,77	88,9	0,45	x	x	x	x		
88,90	x 48,26	3" x	1.1/2" Sch 40 S STD	5,49	3,68	88,9	0,78	x	x	x	x		
88,90	x 48,26	3" x	1.1/2" Sch 80 S XS	7,62	5,08	88,9	0,43			x			x
88,90	x 48,30			2,00	2,00	121,8	1,04				x		
88,90	x 60,30			2,00	2,00	85,8	0,32				x		
88,90	x 60,33	3" x	2" Sch 10 S	3,05	2,77	88,9	0,48	x	x	x	x		
88,90	x 60,33	3" x	2" Sch 40 S STD	5,49	3,91	88,9	0,85	x	x	x	x		
88,90	x 60,33	3" x	2" Sch 80 S XS	7,62	5,54	88,9	1,13			x			x
88,90	x 60,33	3" x	2" Sch 160	11,13	8,71	88,9	0,16						x
88,90	x 73,03	3" x	2.1/2" Sch 10 S	3,05	3,05	88,9	0,52	x	x	x	x		
88,90	x 73,03	3" x	2.1/2" Sch 40 S STD	5,49	5,16	88,9	0,93	x	x	x	x		
88,90	x 73,03	3" x	2.1/2" Sch 80 S XS	7,62	7,01	88,9	2,23			x			
88,90	x 76,10			2,00	2,00	38,4	0,16				x		
88,90	x 76,10			3,00	3,00	38,4	1,23				x		
101,60	x 50,80			1,50	1,50	120,0	0,35	x					
101,60	x 63,50			1,50	1,50	120,0	0,32				x		
101,60	x 76,10			1,50	1,50	120,0	0,30	x			x		
101,60	x 88,90	3.1/2" x	3" Sch 40 S STD	5,74	5,49	101,6	1,28			x			x
104,00	x 52,00			2,00	2,00	160,0	0,45	x					
104,00	x 54,00			2,00	2,00	150,0	0,44				x		
104,00	x 69,00			2,00	2,00	1,1	0,37				x		
104,00	x 84,00			2,00	2,00	0,6	0,27				x		
114,30	x 48,26	4" x	1.1/2" Sch 10 S	3,05	2,77	101,6	0,63	x	x	x	x		
114,30	x 48,26	4" x	1.1/2" Sch 40 S STD	6,02	3,68	101,6	1,18			x			x
114,30	x 60,30			2,00	2,00	162,0	0,45				x		
114,30	x 60,33	4" x	2" Sch 10 S	3,05	2,77	101,6	0,67	x	x	x	x		
114,30	x 60,33	4" x	2" Sch 40 S STD	6,02	3,91	101,6	1,27	x	x	x	x		
114,30	x 60,33	4" x	2" Sch 80 S XS	8,56	5,54	101,6	1,76			x			x
114,30	x 73,03	4" x	2.1/2" Sch 10 S	3,05	3,05	101,6	0,71	x	x	x	x		
114,30	x 73,03	4" x	2.1/2" Sch 40 S STD	6,02	5,16	101,6	1,37	x	x	x	x		
114,30	x 76,10			2,00	2,00	114,6	0,55				x		
114,30	x 76,10			2,50	2,50	114,6	0,68				x		
114,30	x 76,10			3,00	3,00	114,6	0,90				x		

Rvs concentrische lasverloopstukken

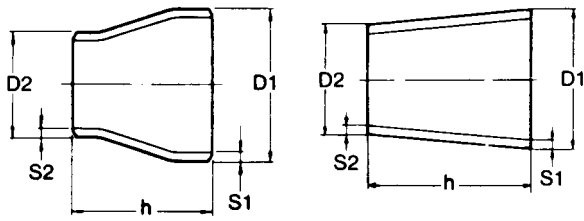


mm Afmeting		inch Afmeting		304L	304L	316L	316L				
D1	D2	D1	D2	S1	S2	h	kg/st	gelast	naadloos	gelast	naadloos
114,30	x 88,90			2,00	2,00	101,6	0,39			x	
114,30	x 88,90	4" x	3" Sch 10 S	3,05	3,05	101,6	0,76	x	x	x	x
114,30	x 88,90	4" x	3" Sch 40 S STD	6,02	5,49	101,6	1,45	x	x	x	x
114,30	x 88,90	4" x	3" Sch 80 S XS	8,56	7,62	101,6	2,02		x		x
129,00	x 69,00			2,00	2,00	180,0	0,85			x	
129,00	x 84,00			2,00	2,00	135,0	0,70			x	
129,00	x 104,00			2,00	2,00	75,0	0,43			x	
139,70	x 76,10			3,00	3,00	190,8	1,50			x	
139,70	x 88,90			2,00	2,00	152,4	0,88			x	
139,70	x 88,90			3,00	3,00	152,4	1,10			x	
139,70	x 114,30			2,00	2,00	76,2	0,49			x	
139,70	x 114,30			3,00	3,00	76,2	0,74		x		x
141,30	x 73,03	5" x	2.1/2" Sch 10 S	3,40	3,05	127,0	2,00			x	
141,30	x 88,90	5" x	3" Sch 10 S	3,40	3,05	127,0	1,22	x	x	x	
141,30	x 88,90	5" x	3" Sch 40 S STD	6,55	5,49	127,0	2,27		x		x
141,30	x 114,30	5" x	4" Sch 10 S	3,40	3,05	127,0	1,33	x	x	x	
141,30	x 114,30	5" x	4" Sch 40 S STD	6,55	6,02	127,0	2,50		x	x	x
154,00	x 84,00			2,00	2,00	210,0	1,22			x	
154,00	x 104,00			2,00	2,00	150,0	0,95			x	
154,00	x 129,00			2,00	2,00	75,0	0,52			x	
168,28	x 88,90	6" x	3" Sch 10 S	3,40	3,05	152,4	1,53	x	x	x	x
168,28	x 88,90	6" x	3" Sch 40 S STD	7,11	5,49	152,4	3,04	x	x	x	x
168,28	x 88,90	6" x	3" Sch 80 S XS	10,97	7,62	152,4	4,56				x
168,28	x 114,30	6" x	4" Sch 10 S	3,40	3,05	152,4	1,65	x	x	x	x
168,28	x 114,30	6" x	4" Sch 40 S STD	7,11	6,02	152,4	3,30	x	x	x	x
168,28	x 114,30	6" x	4" Sch 80 S XS	10,97	8,56	152,4	4,96		x		x
168,28	x 114,30	6" x	4" Sch 160 S	18,24	13,49	152,4	10,22				x
168,28	x 141,30	6" x	5" Sch 10 S	3,40	3,40	152,4	1,78	x	x	x	x
168,28	x 141,30	6" x	5" Sch 40 S STD	7,11	6,55	152,4	3,57		x		x
168,30	x 88,90			2,00	2,00	238,2	1,00			x	
168,30	x 114,30			2,00	2,00	162,0	1,16			x	
168,30	x 114,30			3,00	3,00	162,0	1,70			x	
168,30	x 139,70			2,00	2,00	85,8	0,84			x	
168,30	x 139,70			3,00	3,00	85,8	1,00			x	

Rvs concentrische lasverloopstukken

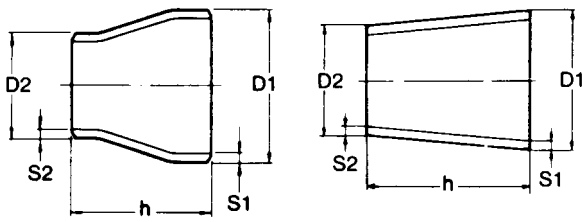



mm Afmeting		inch Afmeting		304L	304L	316L	316L					
D1	D2	D1	D2	S1	S2	h	kg/st	gelast	ndl	gelast	ndl	
204,00	x	104,00		2,00	2,00	300,0	2,28			x		
204,00	x	129,00		2,00	2,00	225,0	1,85			x	x	
204,00	x	154,00		2,00	2,00	150,0	1,33			x	x	
219,08	x	114,30	8" x	4" Sch 10 S	3,76	3,05	152,4	2,43	x	x	x	x
219,08	x	114,30	8" x	4" Sch 40 S STD	8,18	6,02	152,4	5,10	x	x	x	x
219,08	x	141,30	8" x	5" Sch 10 S	3,76	3,40	152,4	5,40			x	
219,08	x	168,30	8" x	6" Sch 10 S	3,76	3,40	152,4	2,72	x	x	x	x
219,08	x	168,30	8" x	6" Sch 40 S STD	8,18	7,11	152,4	5,71	x	x	x	x
219,08	x	168,30	8" x	6" Sch 80 S XS	12,70	10,97	152,4	8,63		x		
219,10	x	114,30			2,00	2,00	314,4	2,10			x	
219,10	x	139,70			3,00	3,00	238,2	3,90			x	
219,10	x	168,30			3,00	3,00	152,4	2,20			x	
254,00	x	154,00			2,00	2,00	300,0	3,04			x	
254,00	x	204,00			2,00	2,00	150,0	1,71			x	
256,00	x	206,00			3,00	3,00	150,0	2,55			x	
273,00	x	168,30			3,00	3,00	314,1	5,27			x	
273,00	x	219,10			3,00	3,00	161,7	3,00			x	
273,05	x	114,30	10" x	4" Sch 10 S	4,19	3,05	177,8	3,80	x			
273,05	x	168,28	10" x	6" Sch 10 S	4,19	3,40	177,8	4,14	x		x	
273,05	x	168,28	10" x	6" Sch 40 S STD	9,27	7,11	177,8	8,78	x		x	x
273,05	x	219,08	10" x	8" Sch 10 S	4,19	3,76	177,8	4,49	x	x	x	
273,05	x	219,08	10" x	8" Sch 40 S STD	9,27	8,18	177,8	9,58	x	x	x	x
304,00	x	204,00			2,00	2,00	300,0	5,00	x		x	
304,00	x	254,00			2,00	2,00	150,0	4,80			x	
306,00	x	206,00			3,00	3,00	300,0	5,70			x	
306,00	x	256,00			3,00	3,00	150,0	6,00			x	
323,85	x	168,28	12" x	6" Sch 10 S	4,57	3,40	203,0	5,92	x		x	
323,85	x	168,28	12" x	6" Sch 40 S STD	9,53	7,11	203,0	11,80			x	
323,85	x	219,08	12" x	8" Sch 10 S	4,57	3,76	203,0	6,31	x		x	
323,85	x	219,08	12" x	8" Sch 40 S STD	9,53	8,18	203,0	3,46			x	
323,85	x	273,05	12" x	10" Sch 10 S	4,52	4,19	203,2	12,70	x		x	
323,85	x	273,05	12" x	10" Sch 40 S STD	9,53	9,27	203,2	13,60	x		x	

Rvs concentrische lasverloopstukken

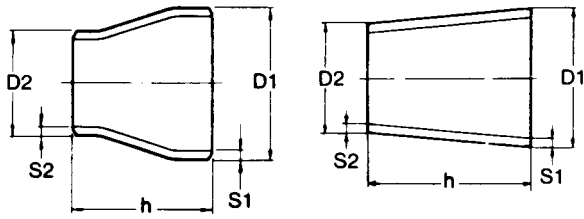



mm Afmeting		inch Afmeting		S1	S2	h	kg/st	304L	304L	316L	316L
D1	D2	D1	D2					gelast	ndl	gelast	ndl
323,90	x 168,30			3,00	3,00	466,8	6,70			x	
323,90	x 219,10			3,00	3,00	314,8	6,40			x	
323,90	x 273,00			3,00	3,00	152,7				x	
355,60	x 219,10			3,00	3,00	409,5	6,50			x	
355,60	x 273,00			3,00	3,00	247,8	5,90	x		x	
355,60	x 273,05	14" x	10" Sch 10 S	4,78	4,19	330,2	12,10			x	
355,60	x 323,90			3,00	3,00	95,1	2,40			x	
355,60	x 323,85	14" x	12" Sch 10 S	4,78	4,57	330,2	13,00	x		x	
356,00	x 306,00			3,00	3,00	150,0	3,70			x	
406,00	x 273,00			3,00	3,00	400,2	8,50			x	
406,00	x 306,00			3,00	3,00	300,0	7,96			x	
406,00	x 356,00			3,00	3,00	150,0	4,26			x	
406,40	x 273,05	16" x	10" Sch 10 S	4,78	4,19	355,6	14,40	x		x	
406,40	x 323,85	16" x	12" Sch 10 S	4,78	4,57	355,6	15,20			x	
406,40	x 323,85	16" x	12" Sch 40 S STD	9,53	9,53	355,6	29,60			x	
406,40	x 355,60	16" x	14" Sch 10 S	4,78	4,78	508,0	15,80	x			
506,00	x 356,00			3,00	3,00	457,2	15,00			x	
506,00	x 406,00			3,00	3,00	300,0	11,00			x	
508,80	x 355,60	20" x	14" Sch 10 S	5,54	4,78	508,0	29,90	x		x	
508,00	x 406,40	20" x	16" Sch 10 S	5,54	4,78	508,0	31,70			x	

Rvs excentrische lasverloopstukken





mm Afmeting		inch Afmeting				304L	304L	316L	316L		
D1	D2	D1	D2	S1	S2	h	kg/st	gelast	naadloos	gelast	naadloos
26,67	x 21,34	3/4"	1/2"	Sch 10 S	2,11	2,11	38,1	0,04	x		
26,67	x 21,34	3/4"	1/2"	Sch 40 S STD	2,87	2,77	38,1	0,06			x
26,67	x 21,34	3/4"	1/2"	Sch 80 S XS	3,91	3,73	38,1	0,08		x	
33,40	x 21,34	1"	1/2"	Sch 10 S	2,77	2,11	50,8	0,09	x	x	
33,40	x 21,34	1"	1/2"	Sch 40 S STD	3,38	2,77	50,8	0,11	x	x	x
33,40	x 21,34	1"	1/2"	Sch 80 S XS	4,55	3,73	50,8	0,13		x	
33,40	x 26,67	1"	3/4"	Sch 10 S	2,77	2,11	50,8	0,10	x	x	x
33,40	x 26,67	1"	3/4"	Sch 40 S STD	3,38	2,87	50,8	0,12		x	x
33,40	x 26,67	1"	3/4"	Sch 80 S XS	4,55	3,91	50,8	0,15			x
33,70	x 21,30				2,00	2,00	37,2	0,05			x
33,70	x 26,90				2,00	2,00	20,4	0,03			x
38,10	x 25,40				1,50	1,50	38,1	0,02			x
42,16	x 26,67	1.1/4"	3/4"	Sch 40 S STD	3,56	2,87	50,8	0,14			x
42,16	x 33,40	1.1/4"	1"	Sch 10 S	2,77	2,77	50,8	0,12			x
42,40	x 21,30				2,00	2,00	21,1	0,10			x
42,40	x 33,70				2,00	2,00	26,1	0,05			x
48,26	x 21,34	1.1/2"	1/2"	Sch 10 S	2,77	2,11	63,5	0,14		x	
48,26	x 26,67	1.1/2"	3/4"	Sch 10 S	2,77	2,11	63,5	0,15		x	
48,26	x 26,67	1.1/2"	3/4"	Sch 40 S STD	3,68	2,87	63,5	0,20			x
48,26	x 26,67	1.1/2"	3/4"	Sch 80 S XS	5,08	3,91	63,5	0,27			x
48,26	x 33,40	1.1/2"	1"	Sch 10 S	2,77	2,77	63,5	0,17		x	x
48,26	x 33,40	1.1/2"	1"	Sch 40 S STD	3,68	3,38	63,5	0,22		x	x
48,26	x 33,40	1.1/2"	1"	Sch 80 S XS	5,08	4,55	63,5	0,29		x	x
48,26	x 42,16	1.1/2"	1.1/4"	Sch 10 S	2,77	2,77	63,5	0,18	x		x
48,26	x 42,16	1.1/2"	1.1/4"	Sch 40 S STD	3,68	3,56	63,5				x
48,30	x 33,70				2,00	2,00	43,8	0,09			x
50,80	x 25,40				1,50	1,50	76,2	0,10			x
50,80	x 38,10				1,50	1,50	38,1	0,12			x
52,00	x 40,00				1,50	1,50	36,0	0,09			x
60,30	x 21,30				2,00	2,00	117,0	0,25			x
60,30	x 33,70				2,00	2,00	79,8	0,24			x
60,30	x 42,40				2,00	2,00	53,7	0,14			x

Rvs excentrische lasverloopstukken





mm Afmeting		inch Afmeting				304L	304L	316L	316L		
D1	D2	D1	D2	S1	S2	h	kg/st	gelast	ndl	gelast	ndl
60,30	x 48,30			2,00	2,00	36,0	0,10			x	
60,30	x 26,67	2" x 3/4"	Sch 10 S	2,77	2,11	76,2	0,22		x		
60,30	x 26,67	2" x 3/4"	Sch 40 S STD	3,91	2,87	76,2	0,30	x			
60,30	x 26,67	2" x 3/4"	Sch 80 S XS	5,54	3,91	76,2	0,41				x
60,30	x 33,40	2" x 1"	Sch 10 S	2,77	2,77	76,2	0,23	x	x	x	x
60,30	x 33,40	2" x 1"	Sch 40 S STD	3,91	3,38	76,2	0,32		x	x	x
60,30	x 33,40	2" x 1"	Sch 80 S XS	5,54	4,55	76,2	0,44		x		x
60,30	x 42,16	2" x 1.1/4"	Sch 10 S	2,77	2,77	76,2	0,25			x	
60,30	x 48,26	2" x 1.1/2"	Sch 10 S	2,77	2,77	76,2	0,27	x	x	x	x
60,30	x 48,26	2" x 1.1/2"	Sch 40 S STD	3,91	3,68	76,2	0,37		x	x	x
60,30	x 48,26	2" x 1.1/2"	Sch 80 S XS	5,54	5,08	76,2	0,51				x
63,50	x 50,80			1,50	1,50	38,1	0,10			x	
69,00	x 36,00			2,00	2,00	99,0	0,22			x	
69,00	x 54,00			2,00	2,00	45,0	0,13			x	
70,00	x 40,00			2,00	1,50	140,0	0,15			x	
70,00	x 52,00			2,00	1,50	125,0	0,10			x	
73,03	x 48,26	2.1/2" x 1.1/2"	Sch 10 S	3,05	2,77	88,9	0,39		x	x	x
73,03	x 48,26	2.1/2" x 1.1/2"	Sch 40 S STD	5,16	3,68	88,9	0,66				x
73,03	x 60,33	2.1/2" x 2"	Sch 10 S	3,05	2,77	88,9	0,43	x	x	x	x
76,10	x 33,70			2,00	2,00	127,2	0,35			x	
76,10	x 42,40			2,00	2,00	101,1	0,30			x	
76,10	x 48,30			2,00	2,00	83,4	0,26			x	
76,10	x 50,80			1,50	1,50	75,9	0,26			x	
76,10	x 60,30			2,00	2,00	47,4	0,16			x	
84,00	x 54,00			2,00	2,00	88,9	0,30			x	
84,00	x 69,00			2,00	2,00	45,0	0,17			x	
88,90	x 33,40	3" x 1"	Sch 10 S	3,05	2,77	88,9	0,43	x	x		x
88,90	x 42,40			2,00	2,00	139,5	0,43			x	
88,90	x 48,26	3" x 1.1/2"	Sch 10 S	3,05	2,77	88,9	0,45	x	x	x	x
88,90	x 48,26	3" x 1.1/2"	Sch 40 S STD	5,49	3,68	88,9	0,78		x	x	x
88,90	x 48,26	3" x 1.1/2"	Sch 80 S XS	7,62	5,08	88,9	0,46				x
88,90	x 48,30			2,00	2,00	121,8	1,04			x	
88,90	x 60,30			2,00	2,00	85,8	0,32			x	
88,90	x 60,33	3" x 2"	Sch 10 S	3,05	2,77	88,9	0,48	x	x	x	x

Rvs excentrische lasverloopstukken



mm Afmeting		inch Afmeting		304L	304L	316L	316L						
D1	D2	D1	D2	S1	S2	h	kg/st	gelast	ndl	gelast	ndl		
88,90	x 60,33	3"	x 2"	Sch 40 S STD	5,49	3,91	88,9	0,85		x	x	x	
88,90	x 60,33	3"	x 2"	Sch 80 S XS	7,62	5,54	88,9	1,18				x	
88,90	x 60,33	3"	x 2"	Sch 160	11,13	8,71	88,9	2,23				x	
88,90	x 73,03	3"	x 2.1/2"	Sch 10 S	3,05	3,05	88,9	0,52		x	x	x	
88,90	x 73,03	3"	x 2.1/2"	Sch 40 S STD	5,49	5,16	88,9	0,93				x	
88,90	x 76,10				3,00	3,00	38,4	0,16			x		
104,00	x 69,00				2,00	2,00	105,0	0,37			x		
104,00	x 70,00				2,00	2,00	102,0	0,50			x		
104,00	x 84,00				2,00	2,00	60,0	0,27			x		
114,30	x 48,26	4"	x 1.1/2"	Sch 10 S	3,05	2,77	101,6	0,63		x		x	
114,30	x 60,30				2,00	2,00	162,0	0,71			x		
114,30	x 60,33	4"	x 2"	Sch 10 S	3,05	2,77	101,6	0,67	x	x	x	x	
114,30	x 60,33	4"	x 2"	Sch 40 S STD	6,02	3,91	101,6	1,27		x	x	x	
114,30	x 60,33	4"	x 2"	Sch 80 S XS	8,56	5,54	101,6	1,78				x	
114,30	x 73,03	4"	x 2.1/2"	Sch 10 S	3,05	3,05	101,6	0,71		x	x	x	
114,30	x 76,10				2,00	2,00	114,6	0,55			x		
114,30	x 88,90				2,00	2,00	76,2	0,39			x		
114,30	x 88,90	4"	x 3"	Sch 10 S	3,05	3,05	101,6	0,76	x	x	x	x	
114,30	x 88,90	4"	x 3"	Sch 40 S STD	6,02	5,49	101,6	1,45		x	x	x	
129,00	x 84,00				2,00	2,00	135,0	0,70			x		
129,00	x 104,00				2,00	2,00	75,0	0,43			x		
139,70	x 76,10				2,00	2,00	190,8	1,04			x		
139,70	x 88,90				2,00	2,00	152,4	0,88			x		
139,70	x 114,30				2,00	2,00	76,2	0,49			x		
139,70	x 114,30				3,00	3,00	76,2	0,74			x		
141,30	x 88,90	5"	x 3"	Sch 10 S	3,40	3,05	127,0	1,22	x				
141,30	x 88,90	5"	x 3"	Sch 40 S	6,55	5,49	127,0	2,27			x		
141,30	x 114,30	5"	x 4"	Sch 10 S	3,40	3,05	127,0	1,33			x		
154,00	x 84,00				2,00	2,00	210,0	1,22			x		
154,00	x 104,00				2,00	2,00	150,0	0,96			x		
154,00	x 129,00				2,00	2,00	75,0	0,52			x		
168,28	x 88,90	6"	x 3"	Sch 10 S	3,40	3,05	152,4	1,53		x	x	x	
168,28	x 88,90	6"	x 3"	Sch 40 S STD	7,11	5,49	152,4	3,04		x	x	x	
168,28	x 114,30	6"	x 4"	Sch 10 S	3,40	3,05	152,4	1,65	x	x	x	x	
168,28	x 114,30	6"	x 4"	Sch 40 S STD	7,11	6,02	152,4	3,30	x	x		x	

Rvs excentrische lasverloopstukken



mm Afmeting		inch Afmeting				304L	304L	316L	316L		
D1	D2	D1	D2	S1	S2	h	kg/st	gelast	naadloos	gelast	naadloos
168,28	x 141,30	6"	5" Sch 10 S	3,40	3,40	152,4	1,78			x	x
168,30	x 114,30			2,00	2,00	162,0	0,96			x	
168,30	x 139,70			3,00	3,00	85,0	1,00			x	
204,00	x 104,00			2,00	2,00	300,0	2,28			x	
204,00	x 129,00			2,00	2,00	225,0	1,85			x	
204,00	x 154,00			2,00	2,00	150,0	1,33			x	
219,08	x 114,30	8"	4" Sch 10 S	3,76	3,40	152,4	2,43	x	x	x	x
219,08	x 168,28	8"	6" Sch 10 S	3,76	3,40	152,4	2,72	x	x	x	x
219,08	x 168,28	8"	6" Sch 40 S STD	8,18	7,11	152,4	5,71	x	x	x	
219,10	x 114,30			2,00	2,00	314,4	2,10			x	
254,00	x 204,00			2,00	2,00	150,0	3,04			x	
273,00	x 168,30			3,00	3,00	314,1	5,27			x	
273,00	x 219,10			3,00	3,00	161,7	3,02			x	
273,05	x 168,30	10"	6" Sch 10 S	4,19	3,40	177,8	4,14	x	x	x	
273,05	x 168,30	10"	6" Sch 40 S STD	9,27	7,11	177,8	8,78				x
273,05	x 219,10	10"	8" Sch 10 S	4,19	3,76	177,8	4,49	x	x	x	
273,05	x 219,10	10"	8" Sch 40 S STD	9,27	8,18	177,8	9,58		x		
323,85	x 219,08	12"	8" Sch 10 S	4,57	3,76	203,2	6,31	x		x	
323,85	x 273,05	12"	10" Sch 10 S	4,57	4,19	203,2	6,78	x		x	
323,85	x 273,05	12"	10" Sch 40 S STD	9,53	9,27	203,2	13,60			x	
323,90	x 168,30			3,00	3,00	466,8	8,73			x	
323,90	x 219,10			3,00	3,00	314,4	6,49			x	
323,90	x 273,00			3,00	3,00	170,7	3,46			x	
355,60	x 219,08	14"	8" Sch 10 S	4,78	3,76	247,5	11,20	x			
355,60	x 273,05	14"	10" Sch 10 S	4,78	4,19	247,5	12,10	x			
406,00	x 306,00			3,00	3,00	300,0	7,98			x	
406,00	x 356,00			3,00	3,00	150,0	4,28			x	
406,40	x 323,90	16"	12" Sch 10 S	4,78	4,57	355,6	15,20	x		x	
406,40	x 355,60	16"	14" Sch 10 S	4,78	4,78	355,6	15,80	x			